


## 技术指标

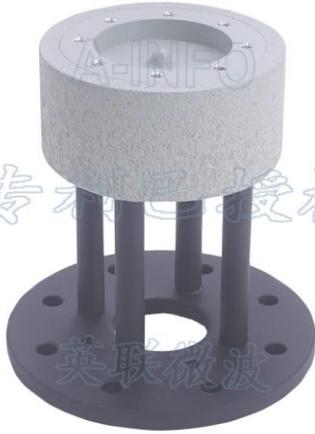

频率(GHz)	4.0 - 40.0
增益(dBi)	3 典型值
极化方式	垂直极化
驻波	2.0:1 典型值
连接器	2.92mm-50K 或 2.4mm-50K
承受功率(瓦 连续波)	30 最大值
工作温度(°C)	-40~+80
材料	铝
尺寸(mm)	80 x 80 x 82.8
净重(Kg)	约 0.2



专利号 (中国)

ZL202220801477.X, ZL201630454726.2

## 外形图 (尺寸: mm)

2.4mm-50K 输出 (型号: SZ-4004000/P)

如需要 2.4mm-50K 输出的外形图, 请联系英联微波。

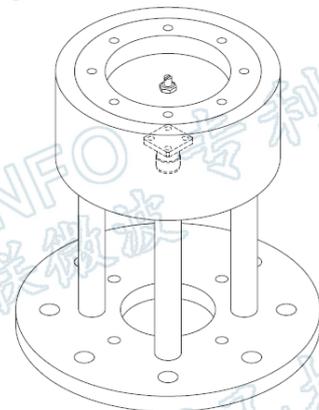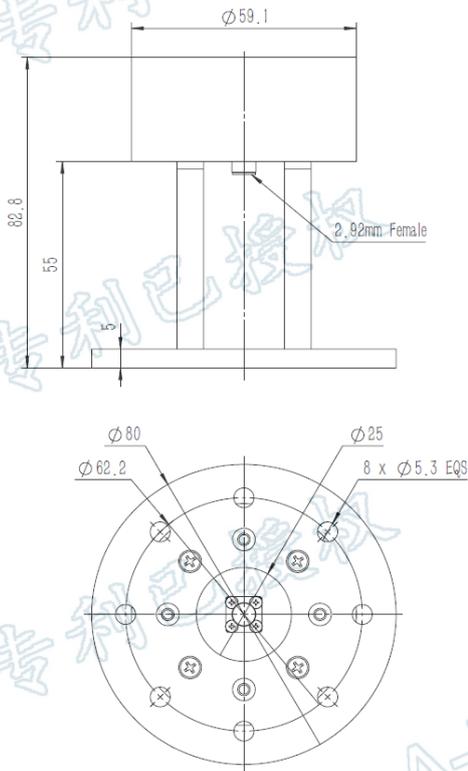

英联微波

第 1 页 / 共 16 页



北京 电话: 010-6266-7326 或 010-6266-7327  
成都 电话: 028-8519-2786 或 028-8519-3047

传真: 010-6266-7379  
传真: 028-8519-3068

网址: www.ainfoinc.com  
www.ainfoinc.cn



2.92mm-50K 输出, 配圆形背夹 (配件, 型号: SZ-4004000/P-MB2)

如需要 2.4mm-50K 输出的外形图, 请联系英联微波.

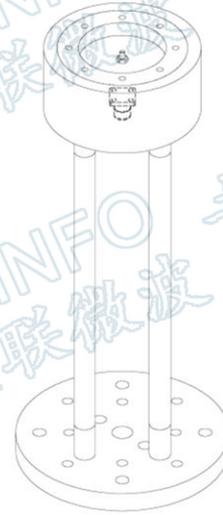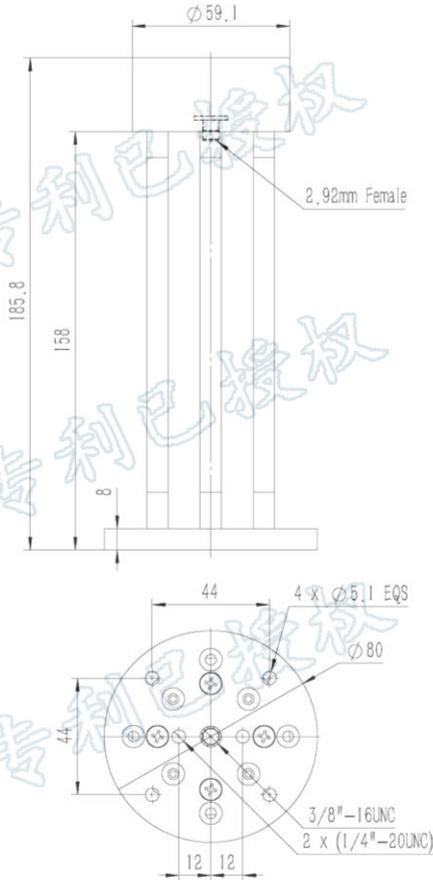


## 测试结果

### 1. 增益 & 天线系数

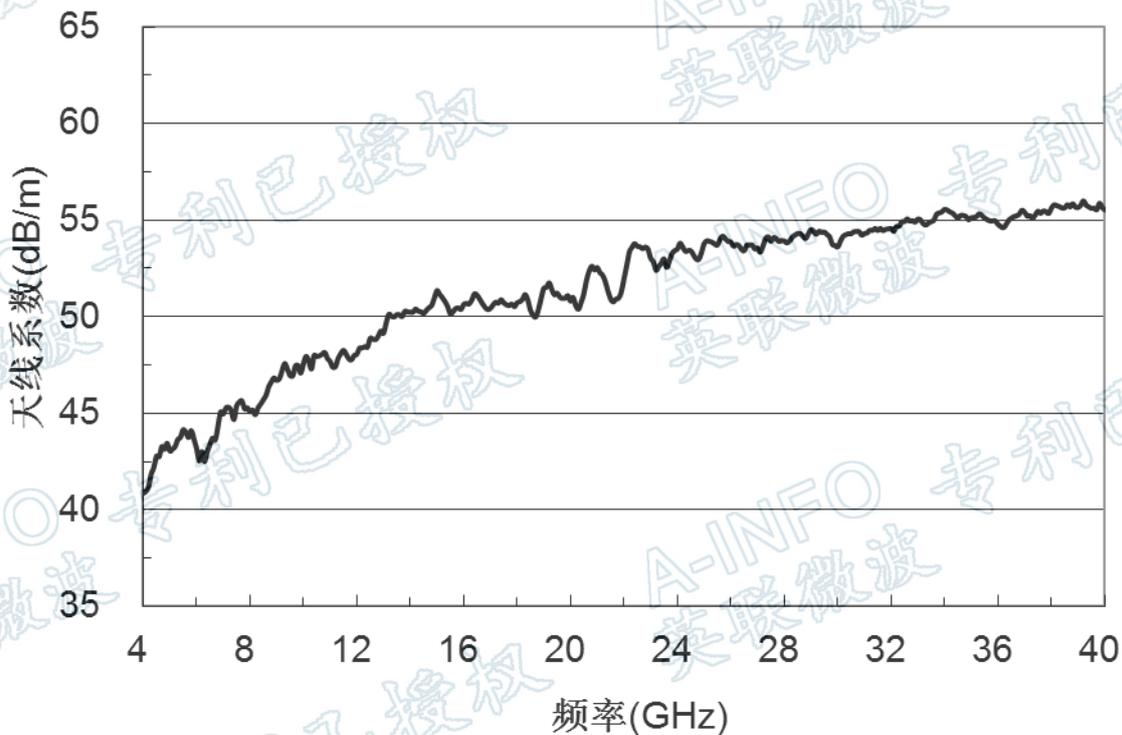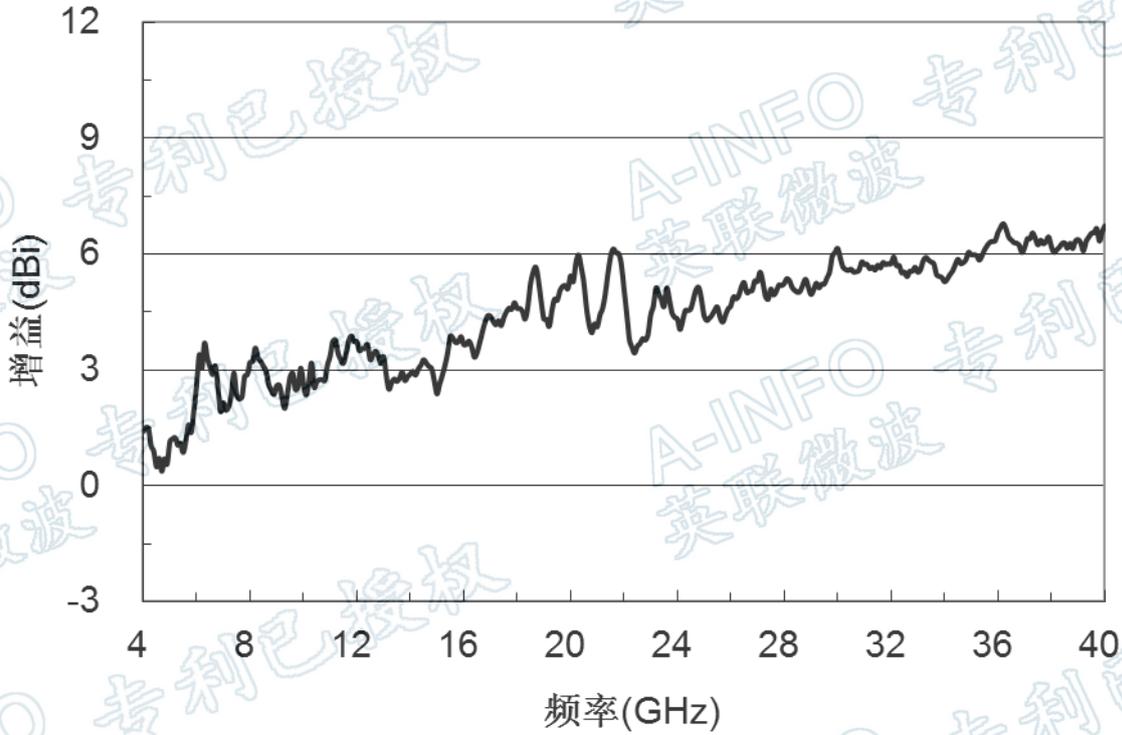

## 2. 驻波

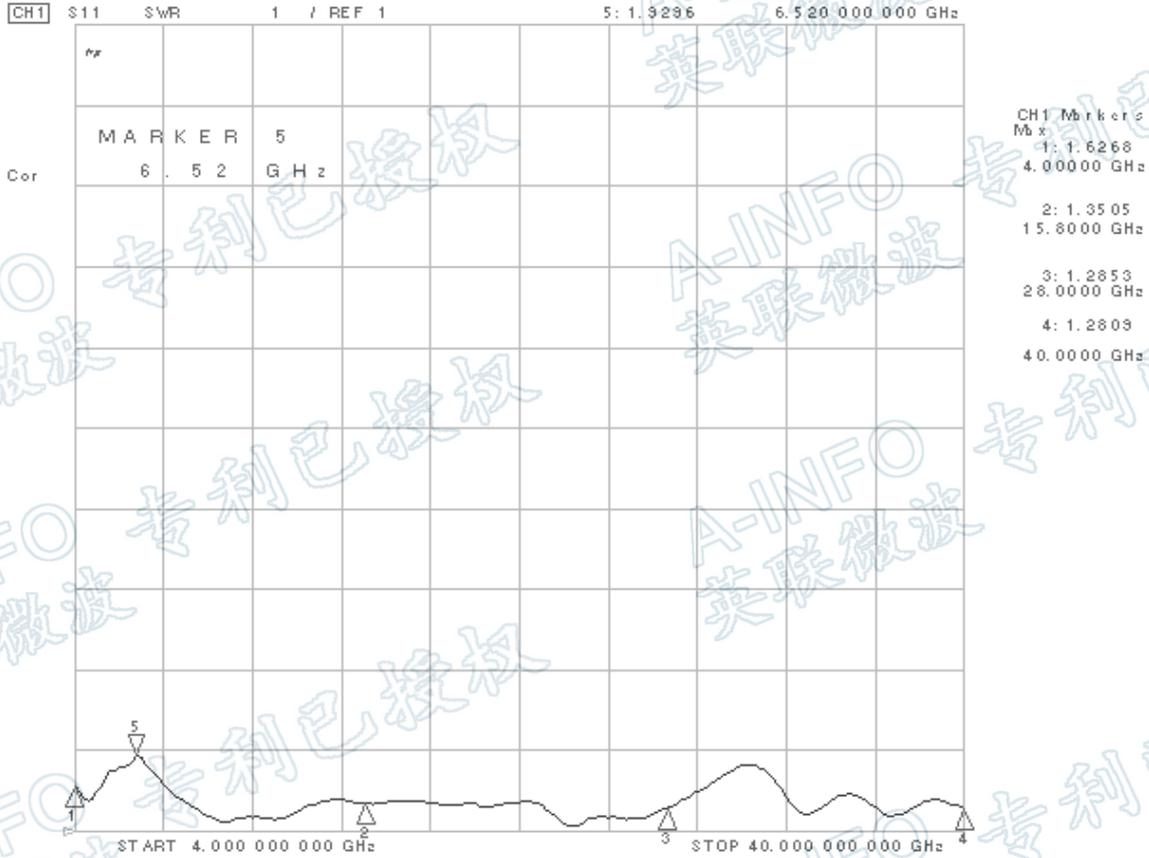

## 3. 方向图

