



2.92mm 系列内转接器


主要性能指标	材料/表面处理
特性阻抗: 50ohm	壳体: 303 不锈钢, 抛光/钝化
频率: DC-40GHz	内导体: 铍青铜, 镀金
耐久性: 500cycles	绝缘体: PEI
工作温度: -55℃ ~ +165℃	
界面: 符合 MIL-STD-348A	

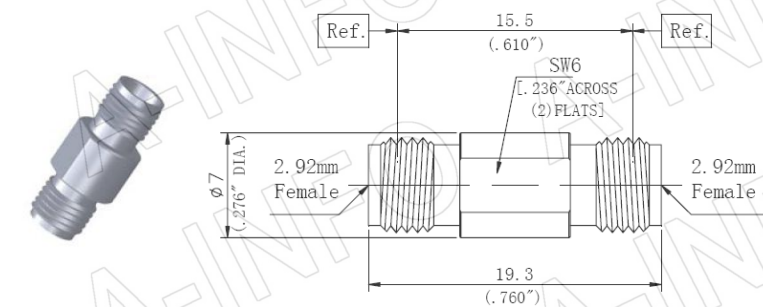


型号	HPA114-01
描述	2.92mm/Female-2.92mm/Female
驻波	DC-40GHz...1.20:1 max

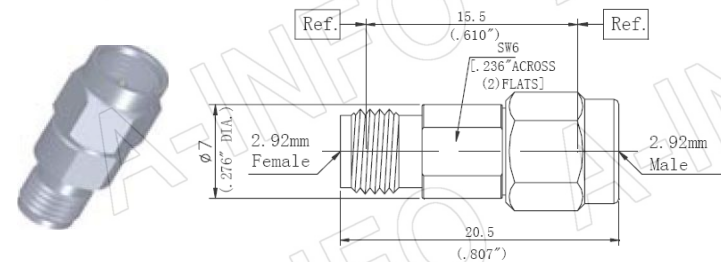


型号	HPA114-02
描述	2.92mm/Male-2.92mm/Female
驻波	DC-40GHz...1.15:1 max

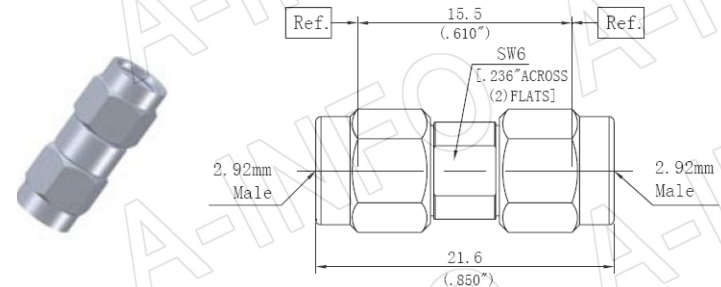


型号	HPA114-03
型号	2.92mm/Male-2.92mm/Male
驻波	DC-40GHz...1.15:1 max

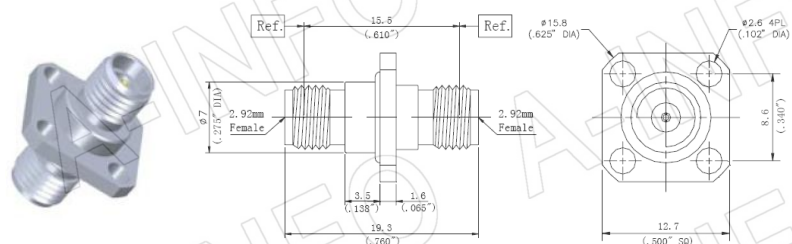


型号	HPA114-04
描述	2.92mm/Female-2.92mm/Female
驻波	DC-40GHz...1.20:1 max

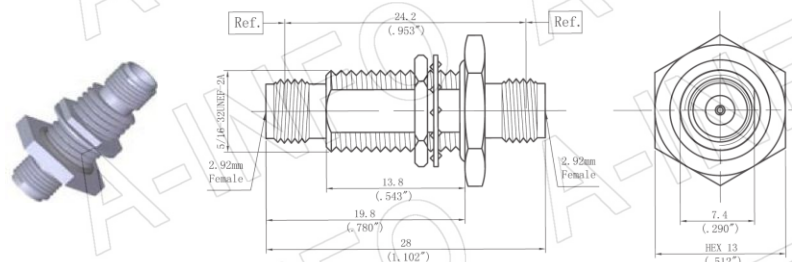

型号	HPA114-05
描述	2.92mm/Female-2.92mm/Female
驻波	DC-40GHz...1.20:1 max

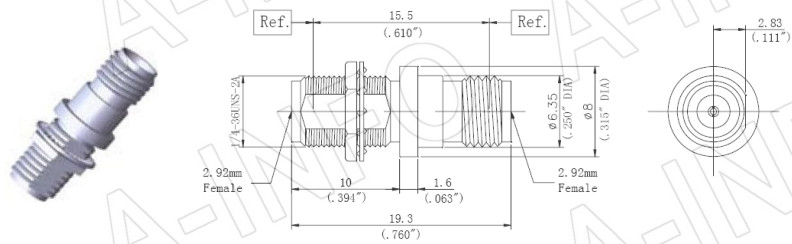

型号	HPA114-06
描述	2.92mm/Female-2.92mm/Female
驻波	DC-40GHz...1.20:1 max

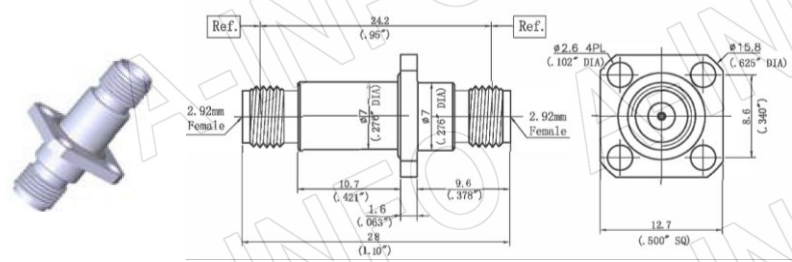

型号	HPA114-07
描述	2.92mm/Female-2.92mm/Female
驻波	DC-40GHz...1.20:1 max