

2.92mm-1.85mm 系列间转换器

主要性能指标

特性阻抗: 50ohm

频率: DC-40GHz

耐久性: 500 次


工作温度: -55°C ~ +165°C

材料/表面处理


壳体: 303 不锈钢, 抛光/钝化

内导体: 铍青铜, 镀金


绝缘体: PEI

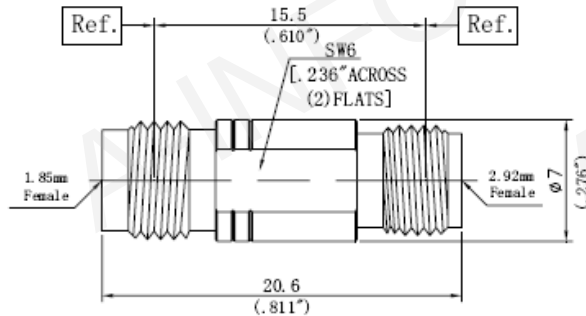


型号	HPA153-01
描述	2.92mm/K-1.85mm/K
驻波	DC-40GHz...1.20:1 max

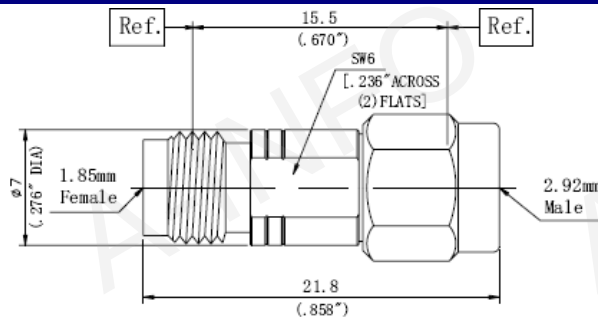

型号	HPA153-02
描述	2.92mm/J-1.85mm/K
驻波	DC-40GHz...1.20:1 max

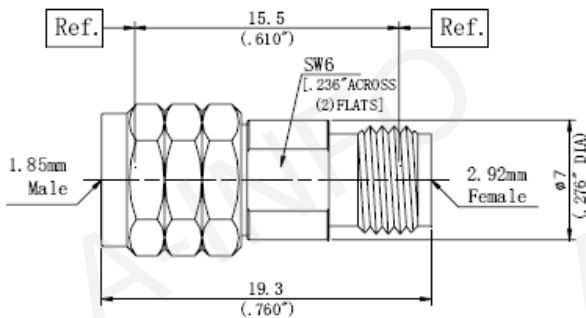

型号	HPA153-03
描述	2.92mm/K-1.85mm/J
驻波	DC-40GHz...1.20:1 max

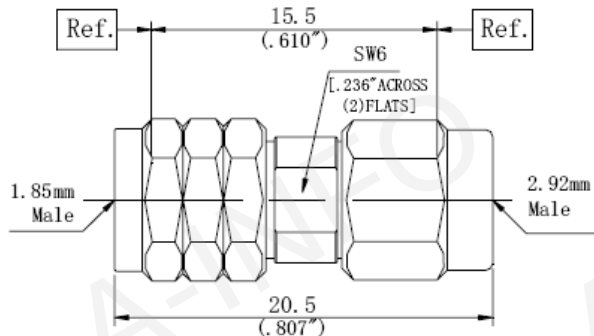

型号	HPA153-04
描述	2.92mm/J-1.85mm/J
驻波	DC-40GHz...1.20:1 max