

2.92mm-SMA 系列间转接器

主要性能指标

特性阻抗: 50ohm

频率: DC-27GHz

耐久性: 500 次


工作温度: -50°C ~ +125°C

材料/表面处理


壳体: 303 不锈钢, 抛光/钝化

内导体: 铍青铜, 镀金


绝缘体: PEI & PTFE

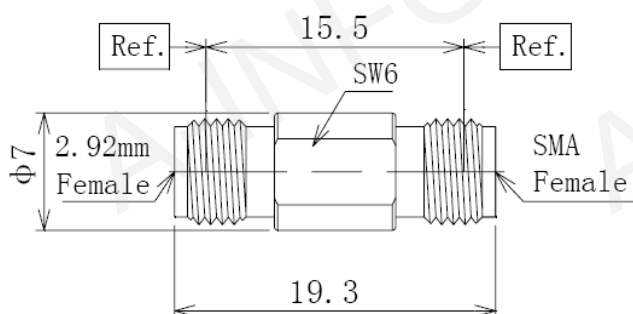


型号	HPA152-01
描述	2.92mm/K-SMA/K
驻波	DC-27GHz...1.15:1 max

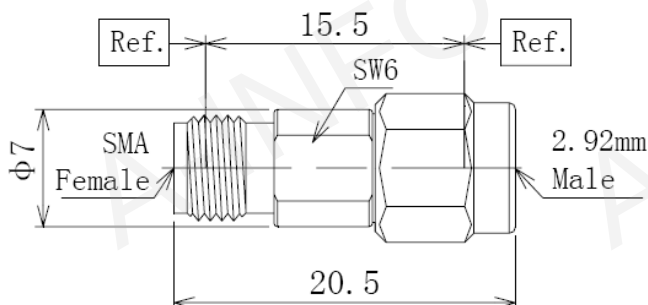

型号	HPA152-02
描述	2.92mm/J-SMA/K
驻波	DC-27GHz...1.15:1 max

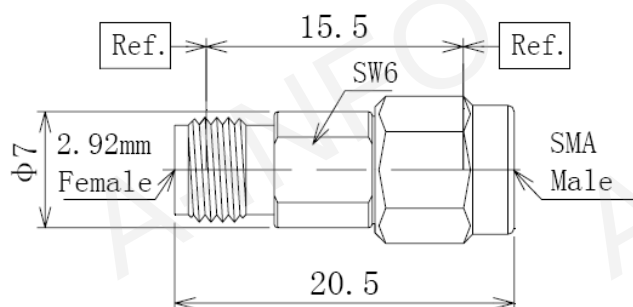

型号	HPA152-03
描述	2.92mm/K-SMA/J
驻波	DC-27GHz...1.15:1 max

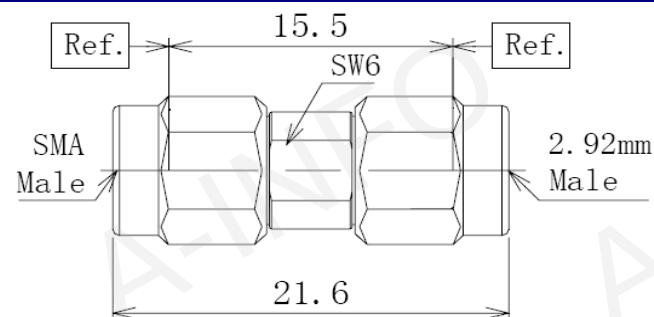

型号	HPA152-04
描述	2.92mm/J-SMA/J
驻波	DC-27GHz...1.15:1 max