

快速插拔转接器

主要性能指标

特性阻抗: 50ohm

耐久性: 500 次


工作温度: -50°C ~ +125°C

材料/表面处理


壳体: 303 不锈钢, 抛光/钝化

内导体: 镀青铜, 镀金


绝缘体: PEI & PTFE

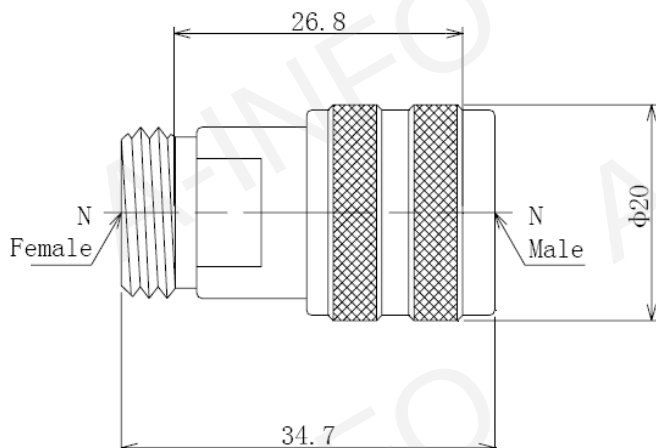

型号	HPA191-01
描述	N/J-N/K
驻波	DC-18GHz...1.15:1 max

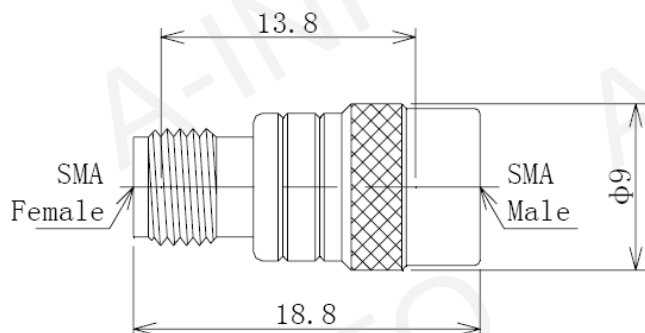

型号	HPA191-02
描述	SMA/J-SMA/K
驻波	DC-27GHz...1.20:1 max

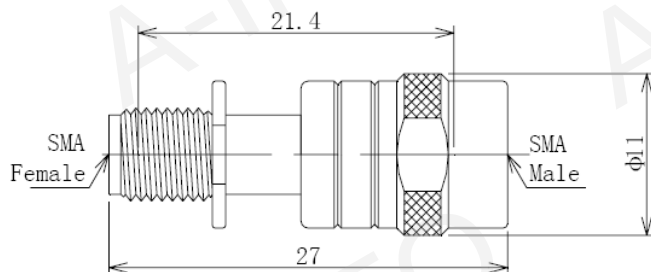

型号	HPA191-03
描述	SMA/J-SMA/K
驻波	DC-27GHz...1.25:1 max