

1.85mm 连接器系列

主要性能指标

特性阻抗: 50ohm

频率: DC-65GHz

驻波: DC-65GHz... 1.25:1 max

耐久性: 500 cycles

工作温度: -55°C ~ +165°C



界面: 符合 IEC-61169

材料/表面处理

壳体: 303 不锈钢, 抛光/钝化

内导体: 镀青铜, 镀金
(MIL-G-45204)

绝缘体: PEI

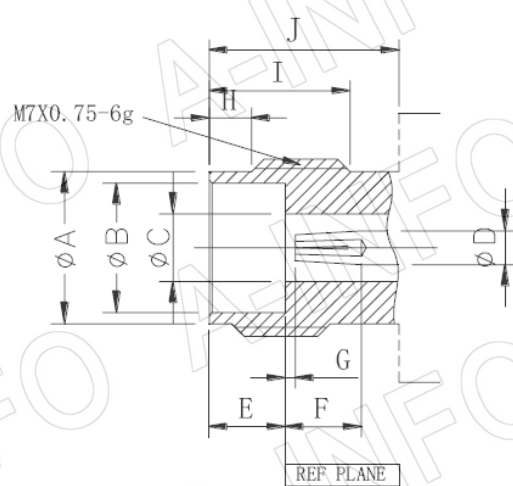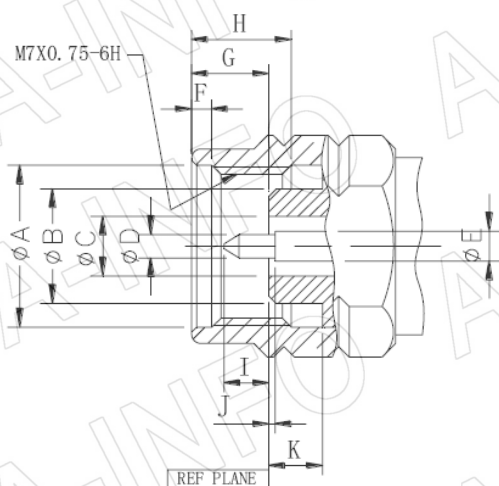


1.85mm Male (J)

	mm		Inch	
	Min	Max	Min	Max
A	7.01	7.11	0.276	0.280
B	4.72	4.75	0.186	0.187
C	1.84	1.86	0.07233	0.0733
D	0.50	0.52	0.0196	0.0206
E	0.79	0.82	0.0311	0.0321
F	0.51	0.76	0.020	0.030
G	1.85	2.45	0.073	0.096
H	4.37	4.62	0.172	0.182
I	1.35	1.45	0.053	0.057
J	--	0.08	--	0.003
K	3.38	3.48	0.133	0.137


1.85mm Female(K)

	mm		Inch	
	Min	Max	Min	Max
A	5.79	5.89	0.228	0.232
B	4.77	4.80	0.1878	0.1888
C	1.84	1.86	0.07233	0.07333
D	0.79	0.82	0.0311	0.0321
E	3.00	3.10	0.118	0.122
F	2.64	--	0.104	--
G	--	0.08	--	0.003
H	1.37	1.63	0.054	0.064
I	4.80	5.05	0.189	0.199
J	6	--	0.236	--


1.85mm 可拆卸式法兰连接器

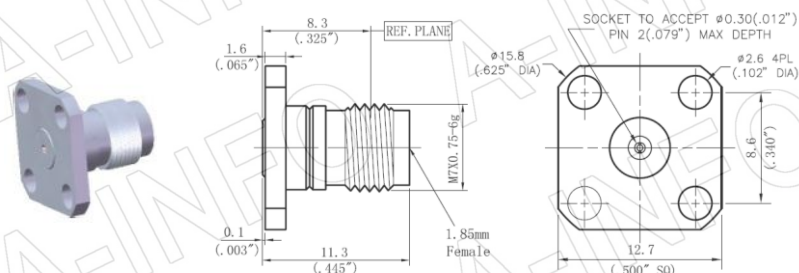


型号	D
HPC7110-09	0.009inch/0.23mm
HPC7110-12	0.012inch/0.30mm

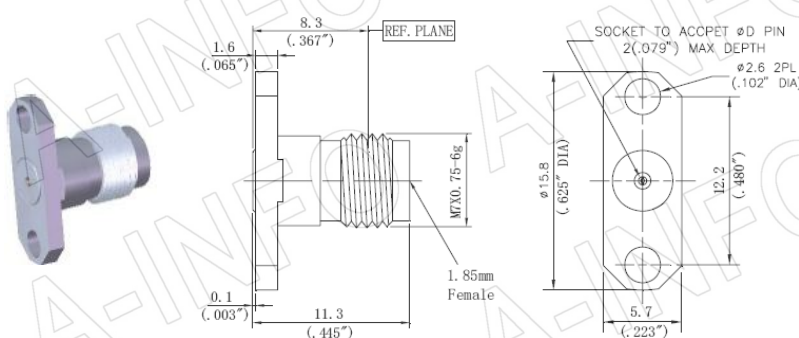


型号	D
HPC7111-09	0.009inch/0.23mm
HPC7111-12	0.012inch/0.30mm

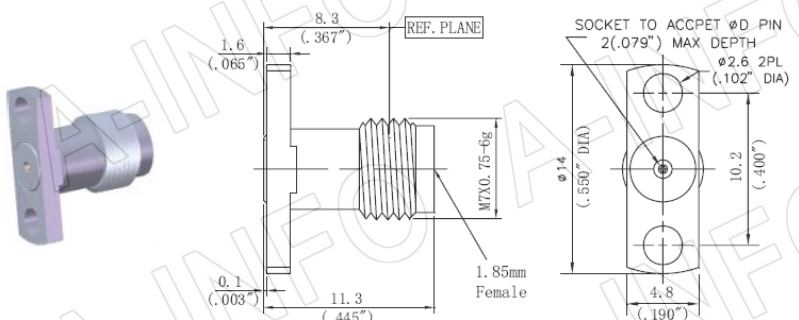


型号	D
HPC7112-09	0.009inch/0.23mm
HPC7112-12	0.012inch/0.30mm

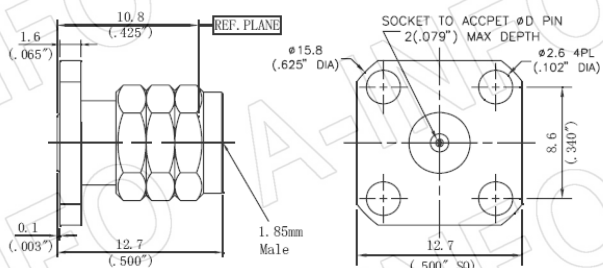

型号	D
HPC7113-09	0.009inch/0.23mm
HPC7113-12	0.012inch/0.30mm

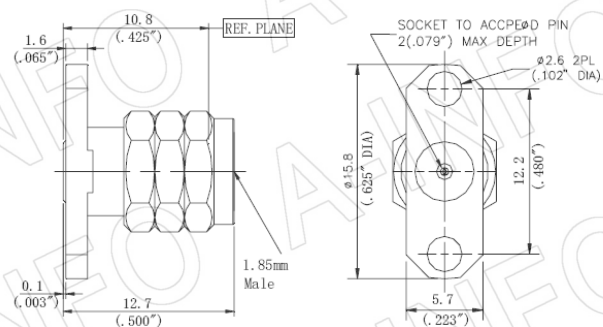


型号	D
HPC7114-09	0.009inch/0.23mm
HPC7114-12	0.012inch/0.30mm

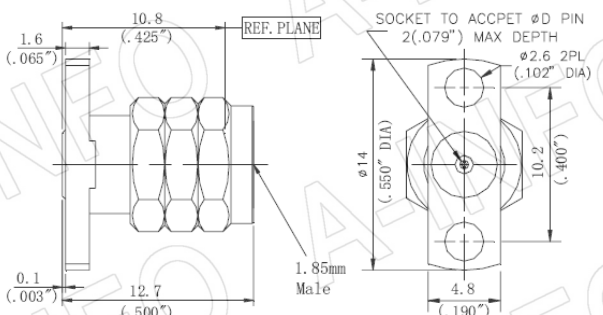


型号		D
HPC7115-09	0.009inch/0.23mm	
HPC7115-12	0.012inch/0.30mm	

1.85mm 可拆卸式螺纹连接器

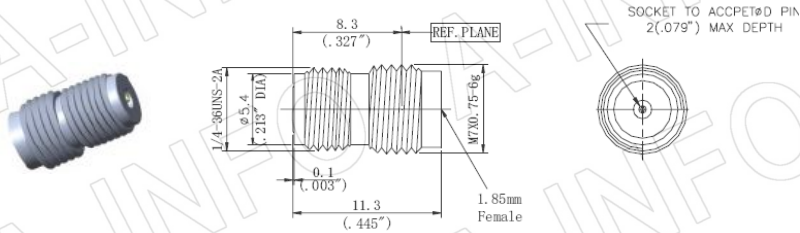

型号	D
HPC7210-09	0.009inch/0.23mm
HPC7210-12	0.012inch/0.30mm

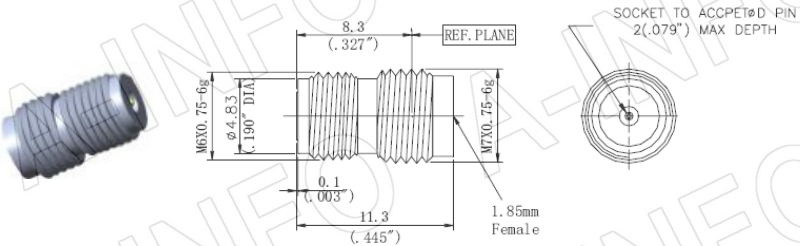

型号	D
HPC7211-09	0.009inch/0.23mm
HPC7211-12	0.012inch/0.30mm