



TNCA 连接器系列

只要性能指标

特性阻抗: 50ohm
频率: DC-18GHz
驻波: DC-18GHz , 1.15:1 max
耐久性: 500cycles
工作温度: -55℃ ~ +165℃
界面: 符合 MIL-STD-348A

材料/表面处理


壳体: 303 不锈钢, 抛光/钝化
内导体: 铍青铜, 镀金(MIL-G-45204)
绝缘体: PEI, PEI&PTFE

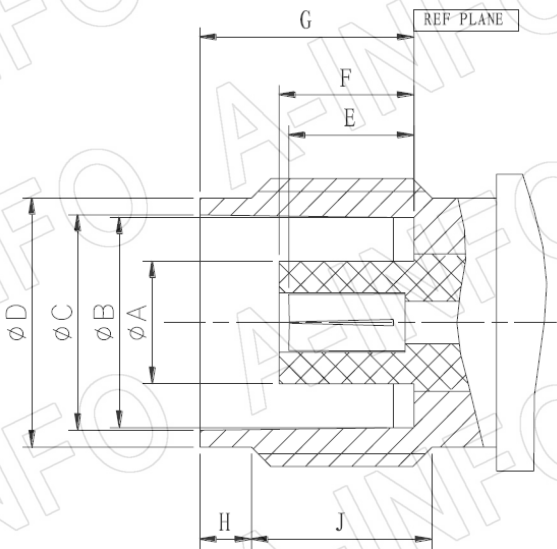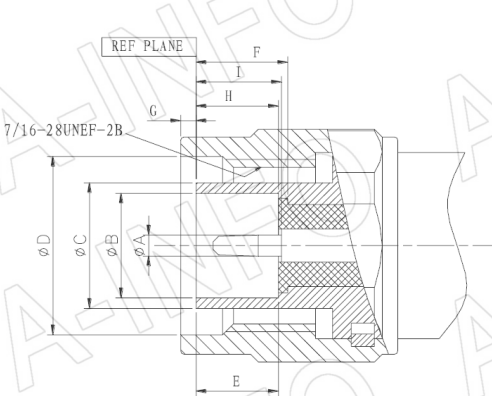


TNCN Male(J)				
	mm		Inch	
	最小	最大	最小	最大
A	1.32	1.37	0.052	0.054
B	6.05	6.15	0.238	0.242
C	7.98	8.05	0.314	0.318
D	11.18		0.44	
E	5.28		0.208	
F	5.38		0.212	
G	5.28		0.208	
H	5.28		0.208	

TNCN Female(K)				
	mm		Inch	
	最小	最大	最小	最大
A	4.62	4.72	0.182	0.186
B	8.10	8.15	0.319	0.321
C	8.31	8.46	0.327	0.333
D	9.6	9.68	0.378	0.381
E	5.03	5.28	0.198	0.208
F	5.03	5.28	0.198	0.208
G	8.31	8.51	0.327	0.335
H	1.73	2.24	0.068	0.088
J	4.75	-	0.187	-


TNCA 可拆卸式连接器

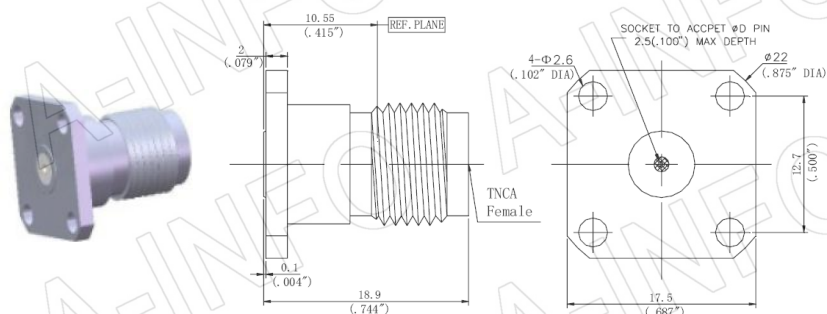

型号	D
HPC2110-18	0.018inch/0.46mm
HPC2110-20	0.020inch/0.51mm
HPC2110-36	0.036inch/0.91mm

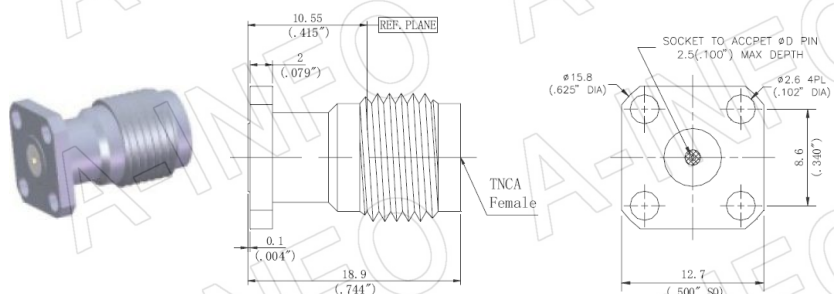


型号	D
HPC2111-18	0.018inch/0.46mm
HPC2111-20	0.020inch/0.51mm
HPC2111-36	0.036inch/0.91mm

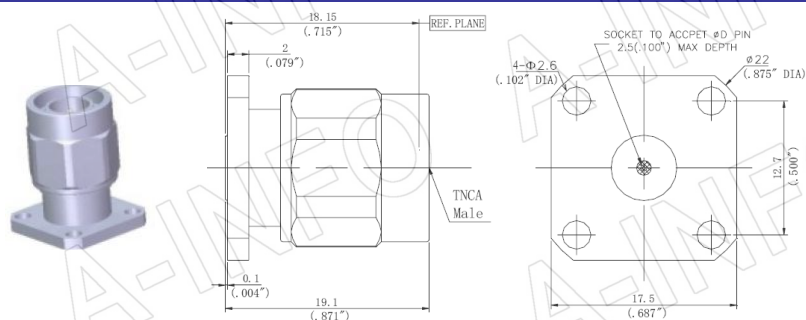


型号	D
HPC2112-18	0.018inch/0.46mm
HPC2112-20	0.020inch/0.51mm
HPC2112-36	0.036inch/0.91mm


TNCA 直连式连接器

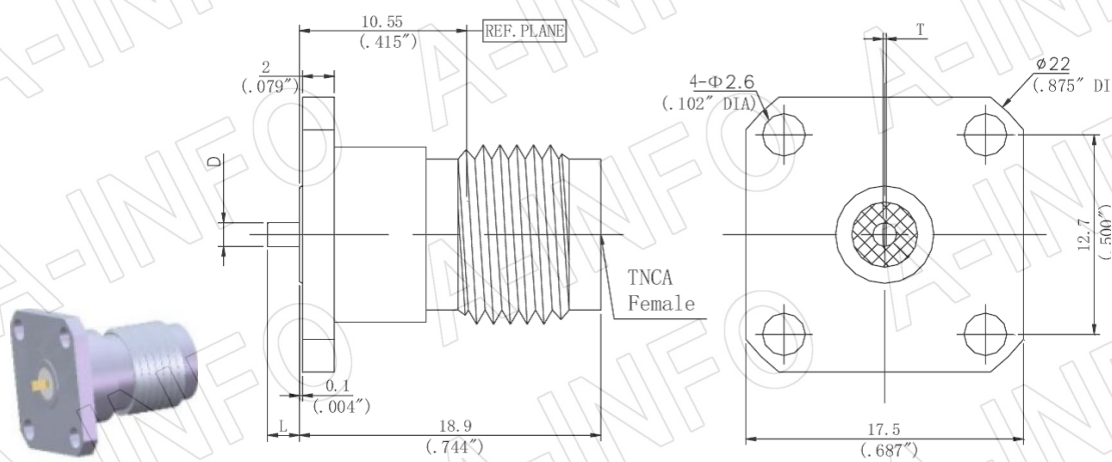

型号	D	L	T
HPC2210-01	1.5mm/0.059inch	2mm/0.079inch	0.2mm/0.008inch

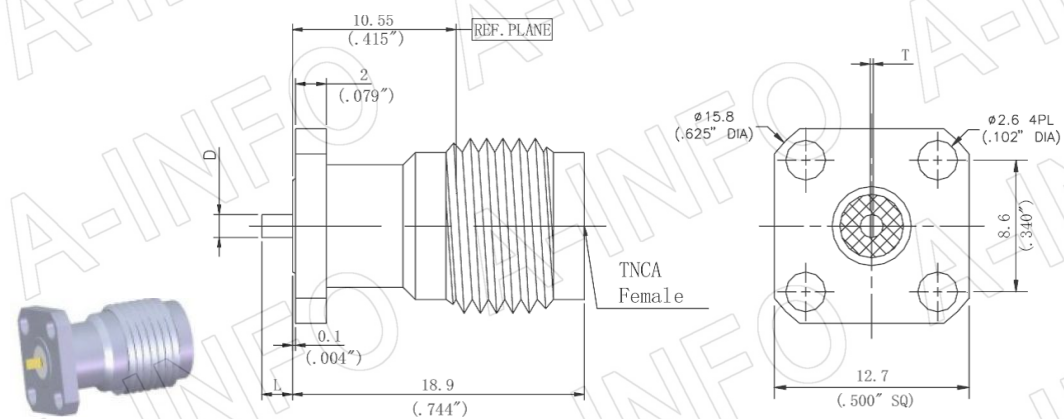

型号	D	L	T
HPC2210-02	1.5mm/0.059inch	2mm/0.079inch	0.2mm/0.008inch

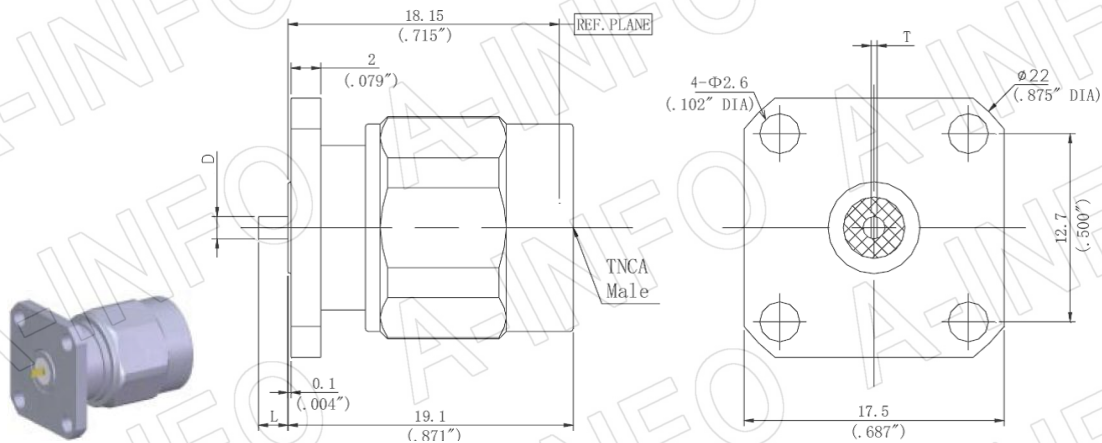

型号	D	L	T
HPC2210-03	1.5mm/0.059inch	2mm/0.079inch	0.2mm/0.008inch