

N 型连接器系列

主要性能指标

特性阻抗: 50ohm

频率: DC-18GHz

驻波: DC-18GHz.... 1.15:1 max

耐久性: 500cycles

工作温度: -55°C ~ +165°C



界面: 符合 MIL-STD-348A

材料/表面处理

壳体 303 不锈钢,抛光/钝化

内导体: 铍青铜, 镀金
(MIL-G-45204)


绝缘体: PEI & PTFE

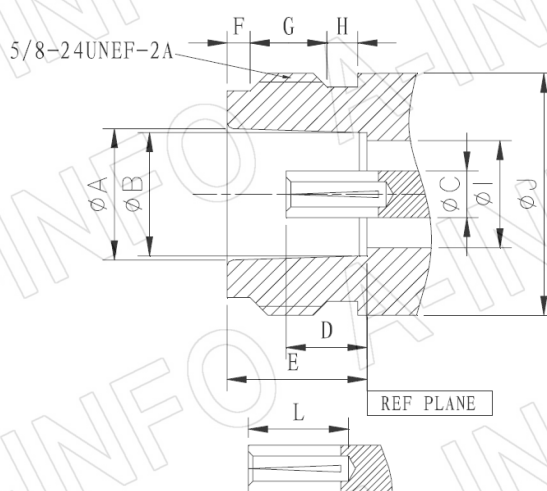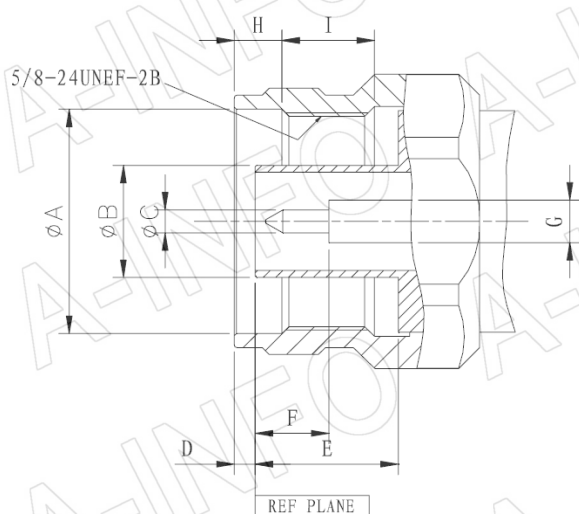


N Type Male				
	mm		Inch	
	Min	Max	Min	Max
A	16.00	—	0.630	—
B	7.98	8.04	0.3140	0.3165
C	1.64	1.67	0.0644	0.0656
D	0.28	1.30	0.011	0.051
E	9.19	9.45	0.362	0.372
F	5.28	5.36	0.208	0.211
G	3.03	3.05	0.1194	0.1200
H	4.01	4.27	0.158	0.168
I	4.50	5.00	0.177	0.197

N Type Female				
	mm		Inch	
	Min	Max	Min	Max
A	8.53	8.74	0.336	0.344
B	8.05	8.10	0.317	0.319
C	3.03	3.05	0.1194	0.1200
D	5.18	5.26	0.204	0.207
E	9.07	9.17	0.357	0.361
F	1.19	1.96	0.047	0.077
G	4.57	5.59	0.180	0.220
H	1.02	2.03	0.040	0.080
I	6.99	7.01	0.2753	0.2759
J	—	15.93	—	0.627


N 型可拆卸式连接器

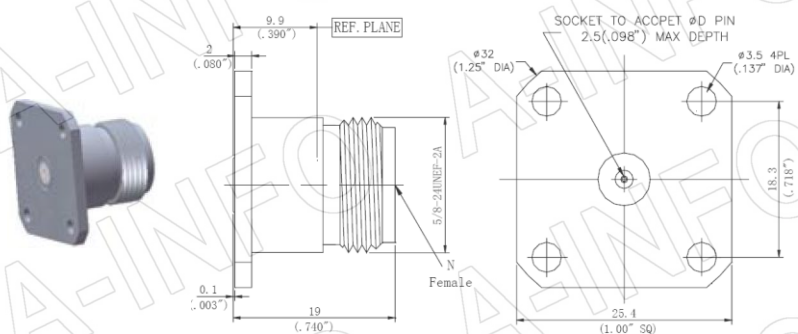


型号	D
HPC5110-18	0.018inch/0.46mm
HPC5110-20	0.020inch/0.51mm
HPC5110-36	0.036inch/0.91mm

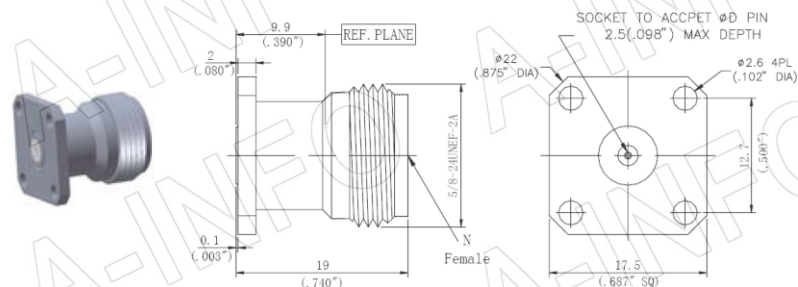


型号	D
HPC5111-18	0.018inch/0.46mm
HPC5111-20	0.020inch/0.51mm
HPC5111-36	0.036inch/0.91mm

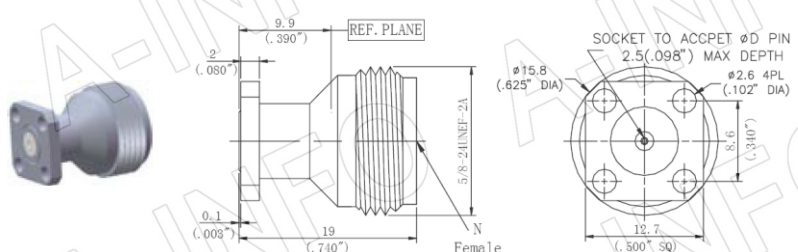

型号	D
HPC5112-18	0.018inch/0.46mm
HPC5112-20	0.020inch/0.51mm
HPC5112-36	0.036inch/0.91mm

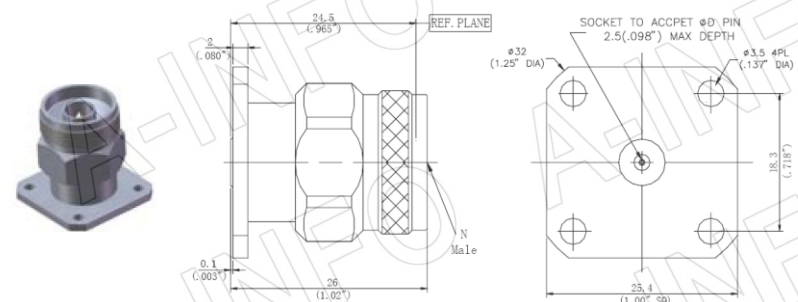


型号	D
HPC5113-18	0.018inch/0.46mm
HPC5113-20	0.020inch/0.51mm
HPC5113-36	0.036inch/0.91mm

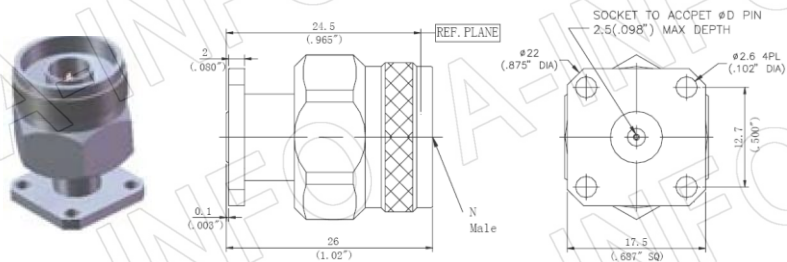


型号	D
HPC5114-18	0.018inch/0.46mm
HPC5114-20	0.020inch/0.51mm
HPC5114-36	0.036inch/0.91mm


N 型金属穿墙式连接器

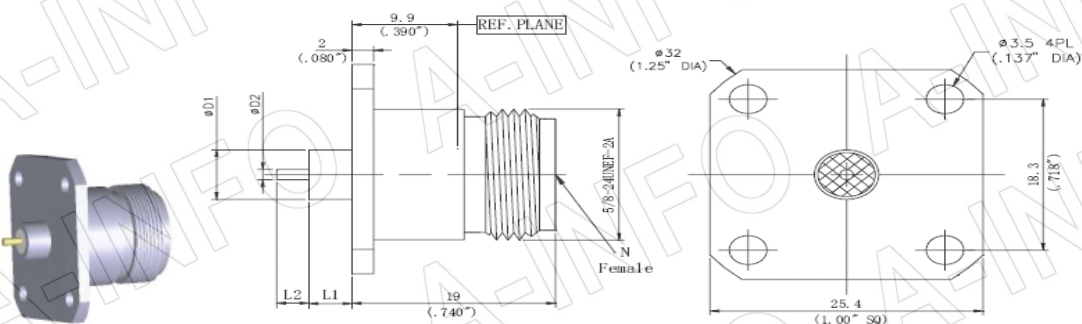


型号	D1	D2	L1	L2
HPC5210-01	6mm/0.236"	1.27mm/0.05"	4mm/0.158"	3mm/0.118"

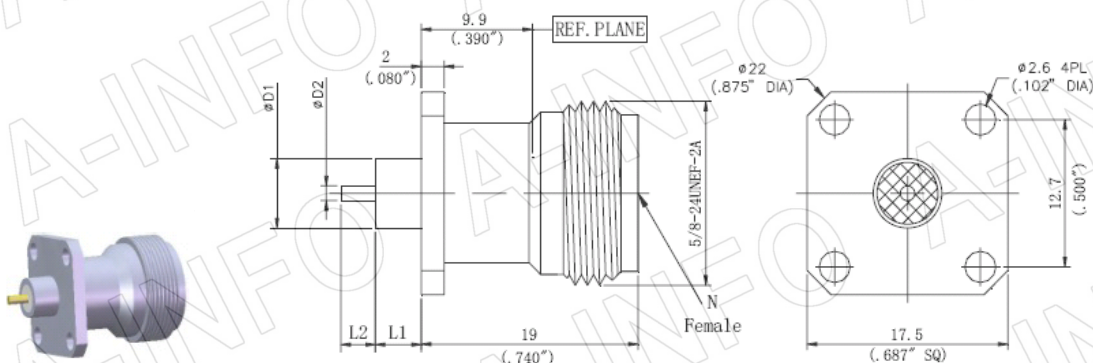


型号	D1	D2	L1	L2
HPC5210-02	6mm/0.236"	1.27mm/0.05"	4mm/0.158"	3mm/0.118"

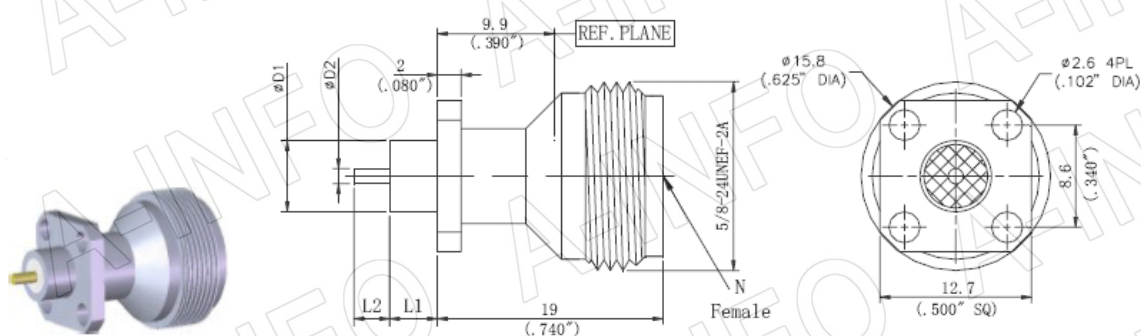

型号	D1	D2	L1	L2
HPC5210-03	6mm/0.236"	1.27mm/0.05"	4mm/0.158"	3mm/0.118"

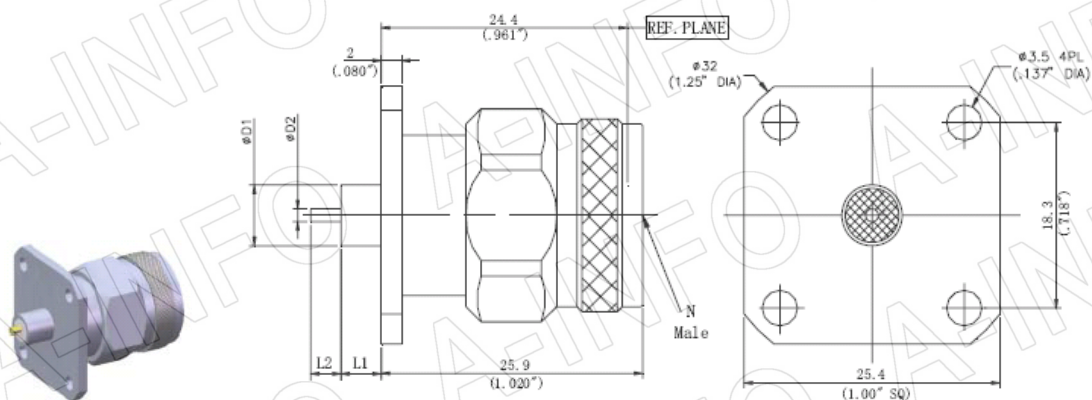


型号	D1	D2	L1	L2
HPC5210-05	6mm/0.236"	1.27mm/0.05"	4mm/0.158"	3mm/0.118"

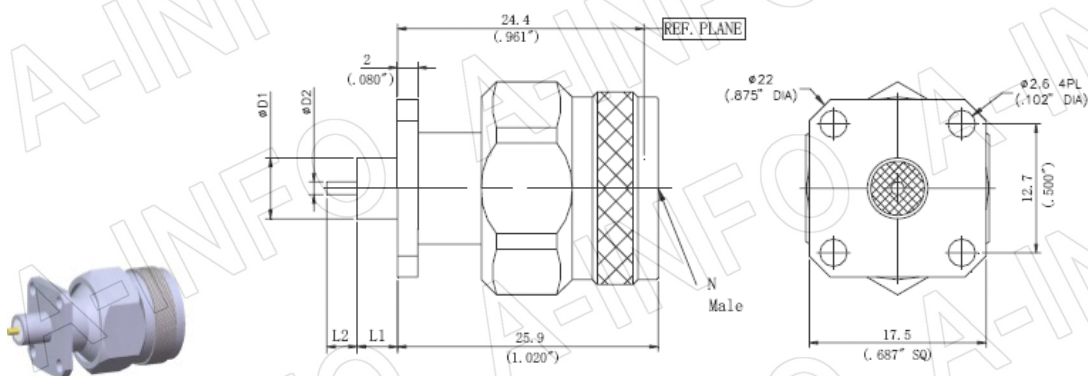


型号	D1	D2	L1	L2
HPC5210-06	6mm/0.236"	1.27mm/0.05"	4mm/0.158"	3mm/0.118"


N 型直连式连接器

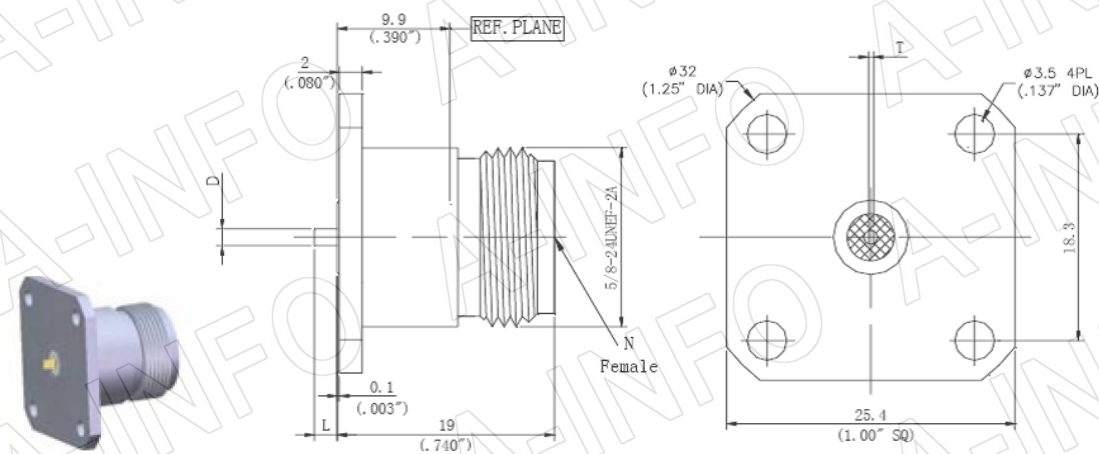


型号	D	L	T
HPC5310-01	1.5mm/0.059	2mm/0.079"	0.2mm/0.008"

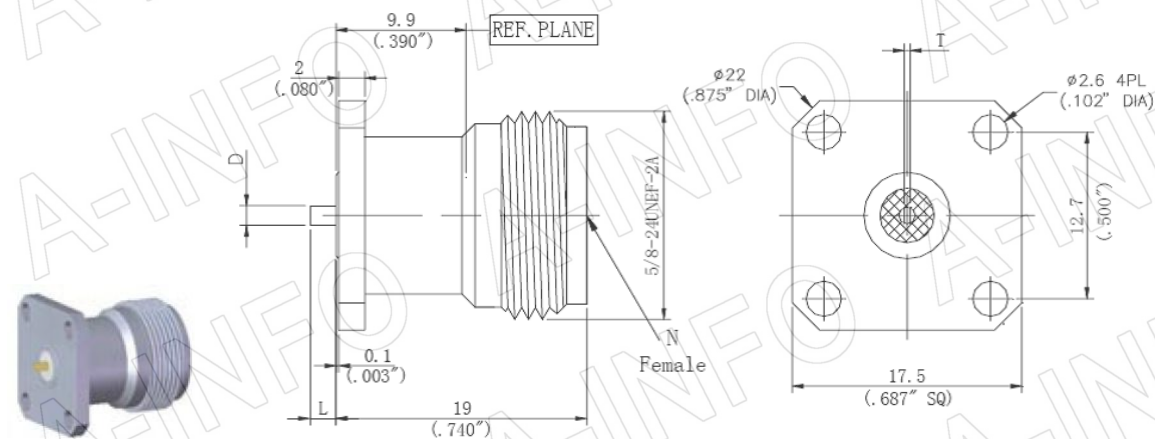


型号	D	L	T
HPC5311-01	1.5mm/0.059	2mm/0.079"	0.2mm/0.008"

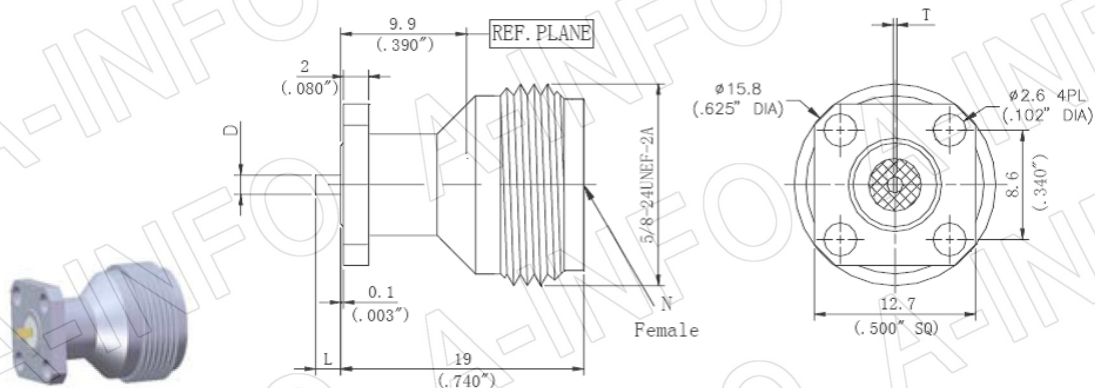

型号	D	L	T
HPC5312-01	1.5mm/0.059	2mm/0.079"	0.2mm/0.008"

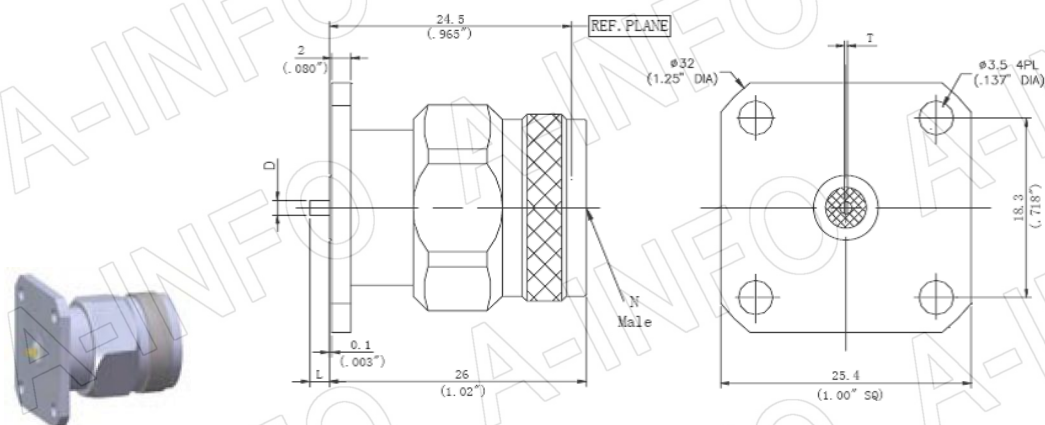


型号	D	L	T
HPC5313-01	1.5mm/0.059	2mm/0.079"	0.2mm/0.008"

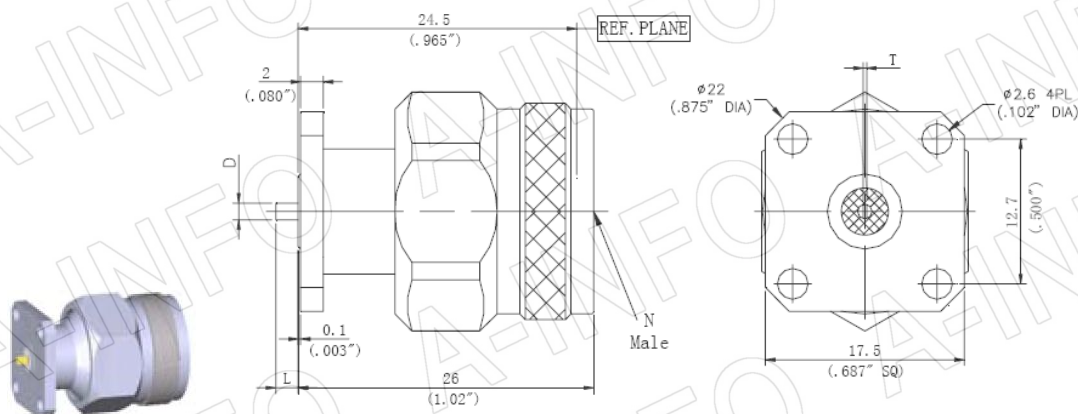

型号	D	L	T
HPC5314-01	1.5mm/0.059	2mm/0.079"	0.2mm/0.008"

N 型端接式连接器

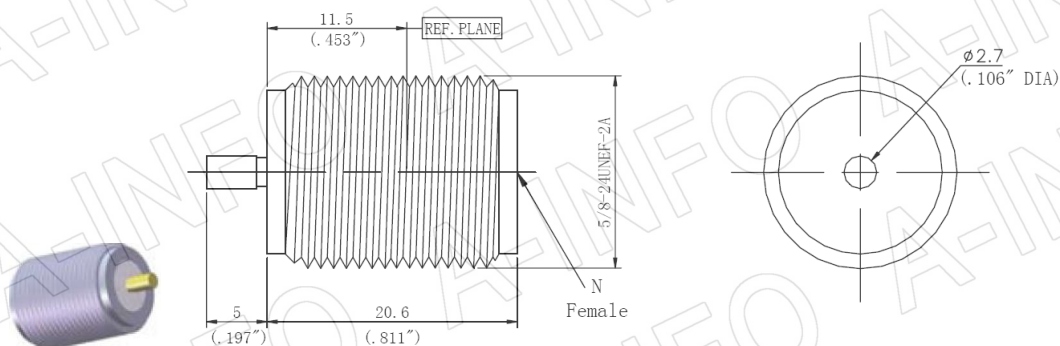

型号

HPC5410-01